


Self-Drilling Screws, Type BSD



SELF-DRILLING SCREWS, TYPE BSD

Nominal Size	Threads per Inch	T		t		P		Minimum Practical Nominal Screw Lengths, Formed Points				Minimum Torsional Strength, lb.-in.
		Major Diameter		Minor Diameter		Protrusion Allowance		90 Head, #2 Pt	Csk Head, #2 Pt	90 Head #3 Pt	Csk Head, #3 Pt	
		Max	Min	Max	Min	#2 Pt	#3 Pt					
4	24	.114	.110	.086	.082	.163	-	5/16	3/8	-	-	14
6	20	.139	.135	.104	.099	.190	.220	5/16	3/8	3/8	7/16	24
8	18	.166	.161	.122	.116	.211	.251	3/8	7/16	7/16	½	42
10	16	.189	.183	.141	.135	.235	.300	7/16	½	½	9/16	61
12	14	.215	.209	.164	.157	.283	.353	½	5/8	½	5/8	92
1/4	14	.246	.240	.192	.185	.318	.393	1/2	5/8	1/2	5/8	150

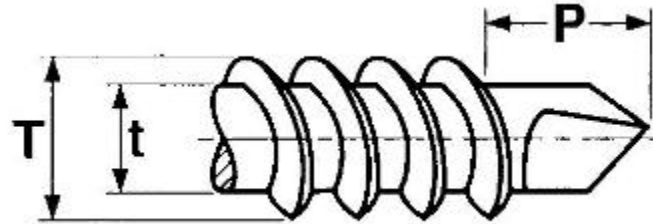