


HEX HEAD LAG SCREWS



Basic Product Diameter	Threads per Inch	E		F			G		H			S	
		Body or Shoulder Diameter		Width Across Flats			Hex Lag Screws						Shoulder Length
		Max	Min	Basic	Max	Min	Width Across Corners		Head Height				
							Max	Min	Basic	Max	Min	Min	
1/4	.2500	10	.260	.237	7/16	.438	.425	.505	.484	11/64	.188	.150	.094
5/16	.3125	9	.324	.298	1/2	.500	.484	.577	.552	7/32	.235	.195	.125
3/8	.3750	7	.388	.360	9/16	.562	.544	.650	.620	1/4	.268	.226	.125
7/16	.4375	7	.452	.421	5/8	.625	.603	.722	.687	19/64	.316	.272	.156
1/2	.5000	6	.515	.482	3/4	.750	.725	.866	.826	11/32	.364	.302	.156
5/8	.6250	5	.642	.605	15/16	.938	.906	1.083	1.033	27/64	.444	.378	.312
3/4	.7500	4-1/2	.768	.729	1-1/8	1.125	1.088	1.299	1.240	1/2	.524	.455	.375

B18.2.1

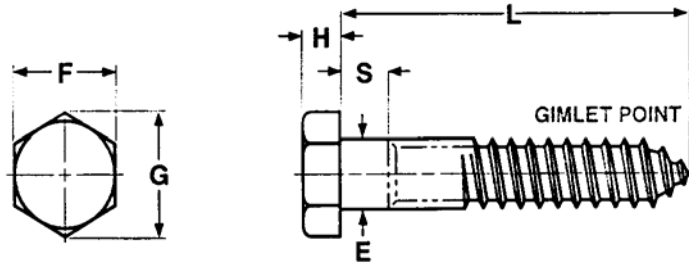