


SAE (TYPE A NARROW) FLAT WASHERS

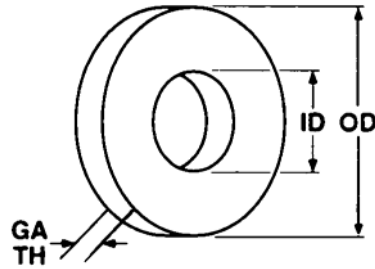

Bolt Size, In.	Outside Dia., In.	Inside Dia., In.	American Standard Gauge	Approx. Lbs. Per M Pcs.	Approx. No./Pcs. Per Lb.
4	5/16	1/8	21 (1/32)	.58	1650
6	3/8	5/32	18 (3/64)	1.26	790
8	7/16	3/16	18 (3/64)	1.7	585
3/16	1/2	7/32	18 (3/64)	2.3	435
12	9/16	1/4	16 (1/16)	3.4	280
1/4	5/8	9/32	16 (1/16)	4.5	222
5/16	11/16	11/32	16 (1/16)	5.2	192
3/8	13/16	13/32	16 (1/16)	7.2	140
7/16	59/64	15/32	16 (1/16)	9.5	105
1/2	1-1/16	17/32	13 (3/32)	18.3	55
9/16	1-3/16	19/32	13 (3/32)	23.4	43
5/8	1-5/16	21/32	13 (3/32)	27.7	36
3/4	1-1/2	13/16	10 (9/64)	47.4	21
7/8	1-3/4	15/16	10 (9/64)	63	16
1	2	1-1/16	10 (9/64)	83	12
1-1/8	2-1/4	1-3/16	10 (9/64)	109	9.2
1-1/4	2-1/2	1-5/16	9(5/32)	160	6.25
1-3/8	2-3/4	1-7/16	9(5/32)	190	5.25
1-1/2	3	1-9/16	9(5/32)	240	4.25