


SPLIT LOCK WASHERS (MEDIUM AND HEAVY)

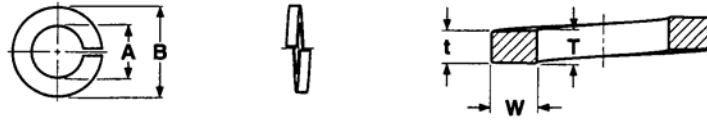

Nominal Washer Size	A		B		T		W		
	Inside Diameter		Outside Diameter		Mean Sect. Thickness (T + t) / 2		Section Width		
	Max	Min	Med. Max	Heavy Max	Med. Min	Heavy Min	Med. Min	Heavy Min	
2	.086	.094	.088	.172	.182	.020	.025	.035	.040
3	.099	.107	.101	.195	.209	.025	.031	.040	.047
4	.112	.120	.114	.209	.223	.025	.031	.040	.047
5	.125	.133	.127	.236	.252	.031	.040	.047	.055
6	.138	.148	.141	.250	.266	.031	.040	.047	.055
8	.164	.174	.167	.293	.307	.040	.047	.055	.062
10	.190	.200	.193	.334	.350	.047	.056	.062	.070
12	.216	.227	.220	.377	.391	.056	.063	.070	.077
1/4	.250	.262	.254	.489	.491	.062	.077	.109	.110
5/16	.312	.326	.317	.586	.596	.078	.097	.125	.130
3/8	.375	.390	.380	.683	.691	.094	.115	.141	.145
7/16	.438	.455	.443	.779	.787	.109	.133	.156	.160
1/2	.500	.518	.506	.873	.883	.125	.151	.171	.176
9/16	.562	.582	.570	.971	.981	.141	.170	.188	.193
5/8	.625	.650	.635	1.079	1.093	.156	.189	.203	.210
11/16	.688	.713	.698	1.176	1.192	.172	.207	.219	.227
3/4	.750	.775	.760	1.271	1.291	.188	.226	.234	.244
13/16	.812	.843	.824	1.367	1.391	.203	.246	.250	.262
7/8	.875	.905	.887	1.464	1.494	.219	.266	.266	.281
15/16	.938	.970	.950	1.560	1.594	.234	.284	.281	.298
1	1.000	1.042	1.017	1.661	1.705	.250	.306	.297	.319
1-1/16	1.062	1.107	1.080	1.756	1.808	.266	.326	.312	.338
1-1/8	1.125	1.172	1.144	1.853	1.909	.281	.345	.328	.356
1-3/16	1.188	1.237	1.208	1.950	2.008	.297	.364	.344	.373
1-1/4	1.250	1.302	1.271	2.045	2.113	.312	.384	.359	.393
1-5/16	1.312	1.366	1.334	2.141	2.211	.328	.403	.375	.410
1-3/8	1.375	1.432	1.398	2.239	2.311	.344	.422	.391	.427
1-7/16	1.438	1.497	1.462	2.334	2.406	.359	.440	.406	.442
1-1/2	1.500	1.561	1.525	2.430	2.502	.375	.458	.422	.458